



No.	Rev.	Revision Record	Name	Date
△	A0	首次发行 (在WGJ84003A-KDA-A1的基础上改为2511方案)	PLX	2018-01-16

正视图

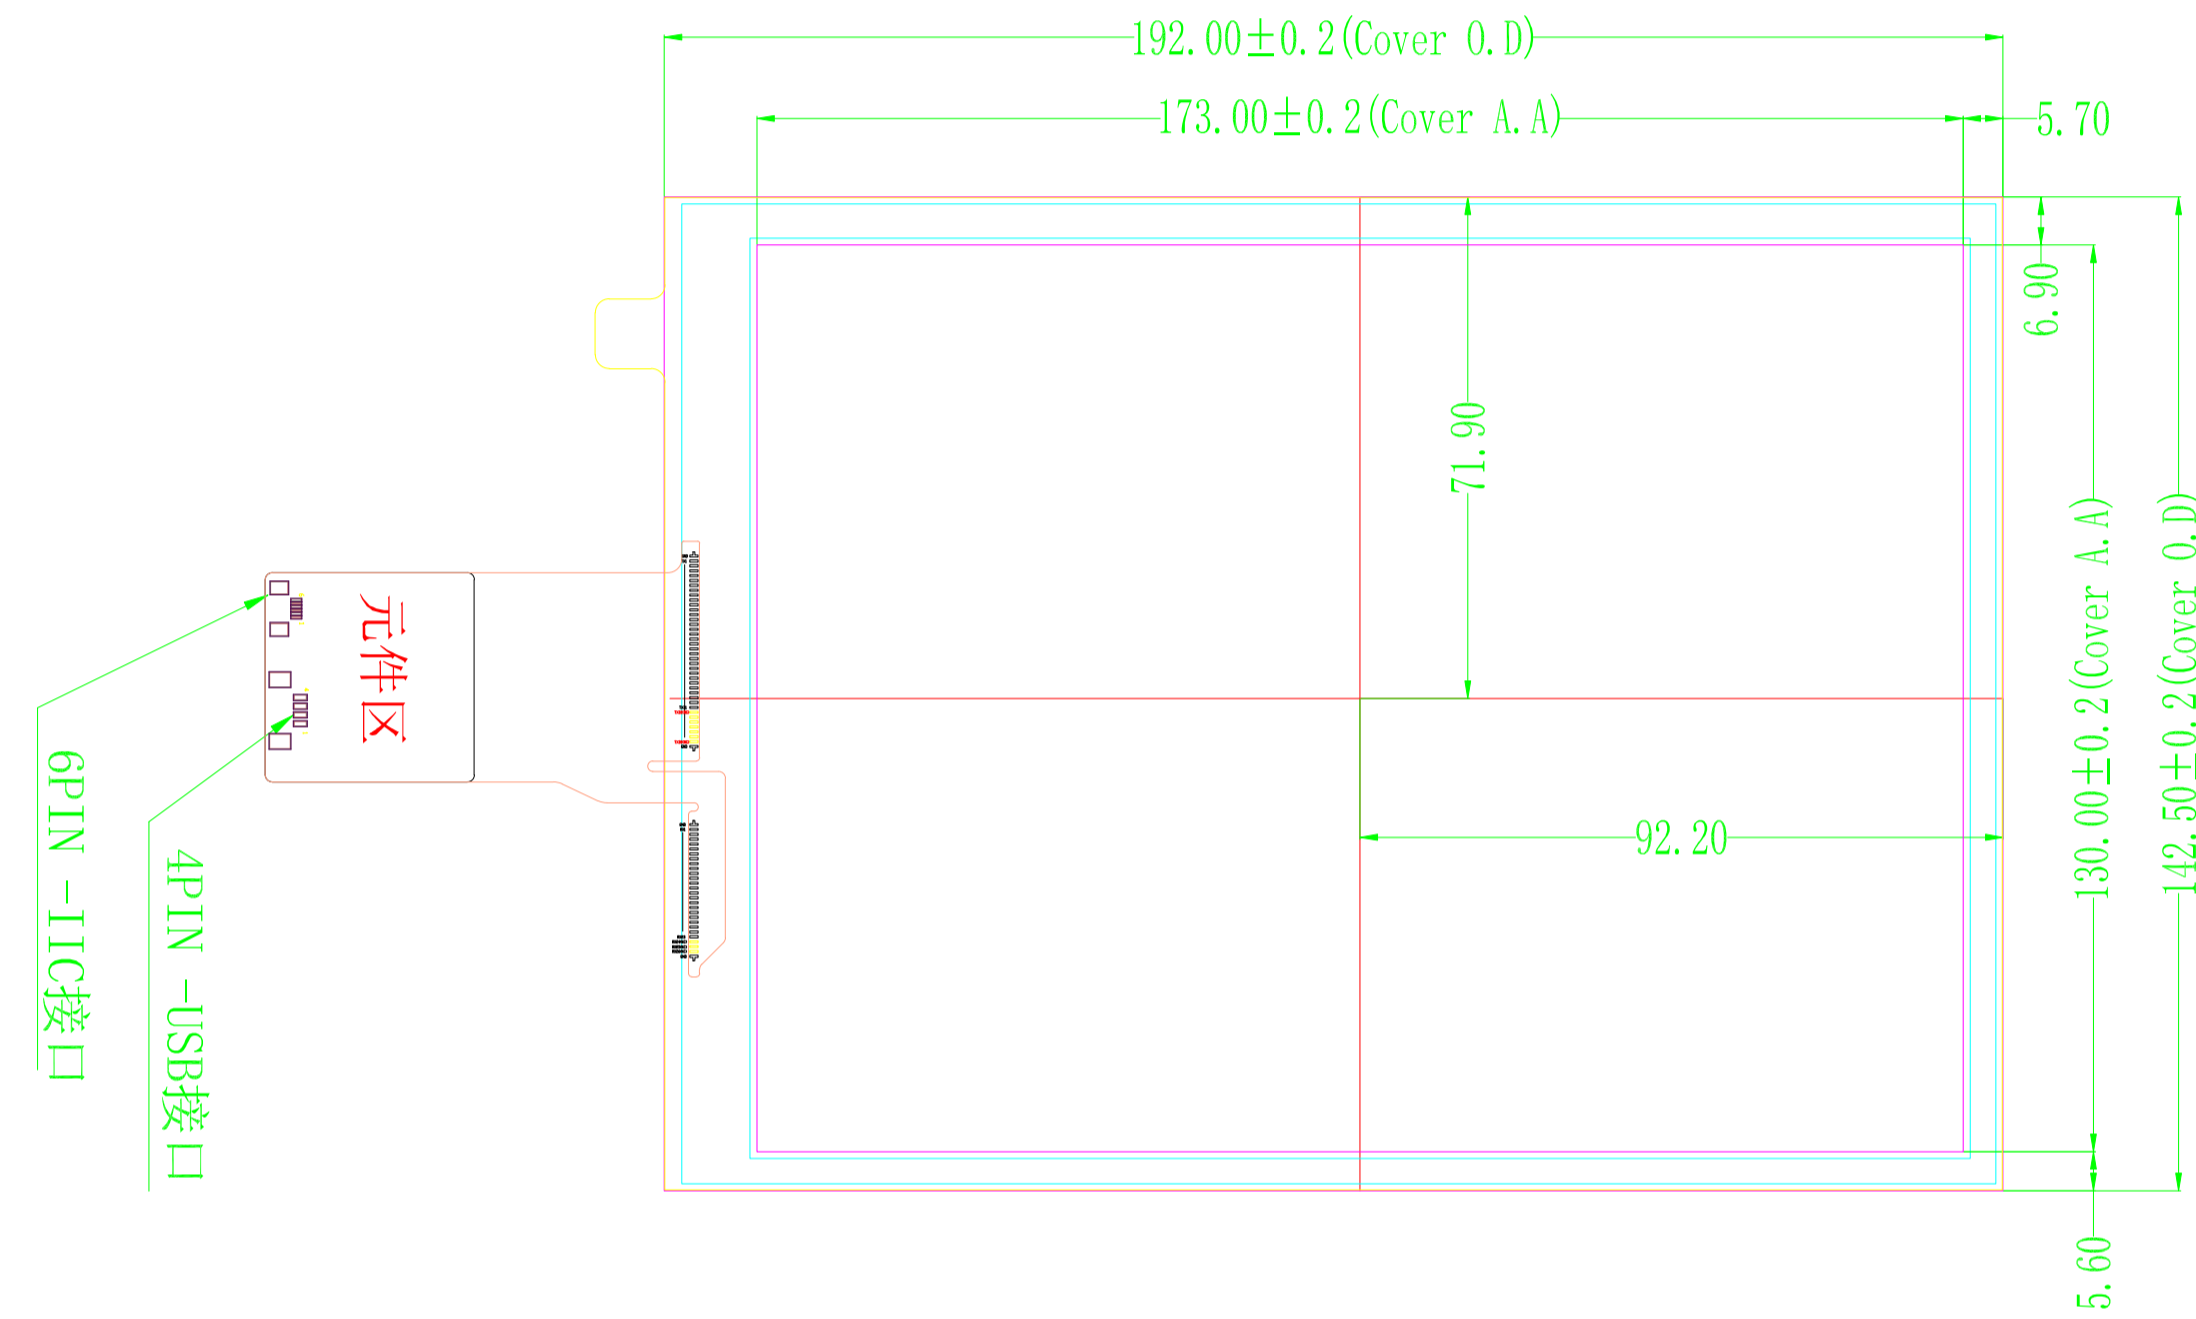

背视图

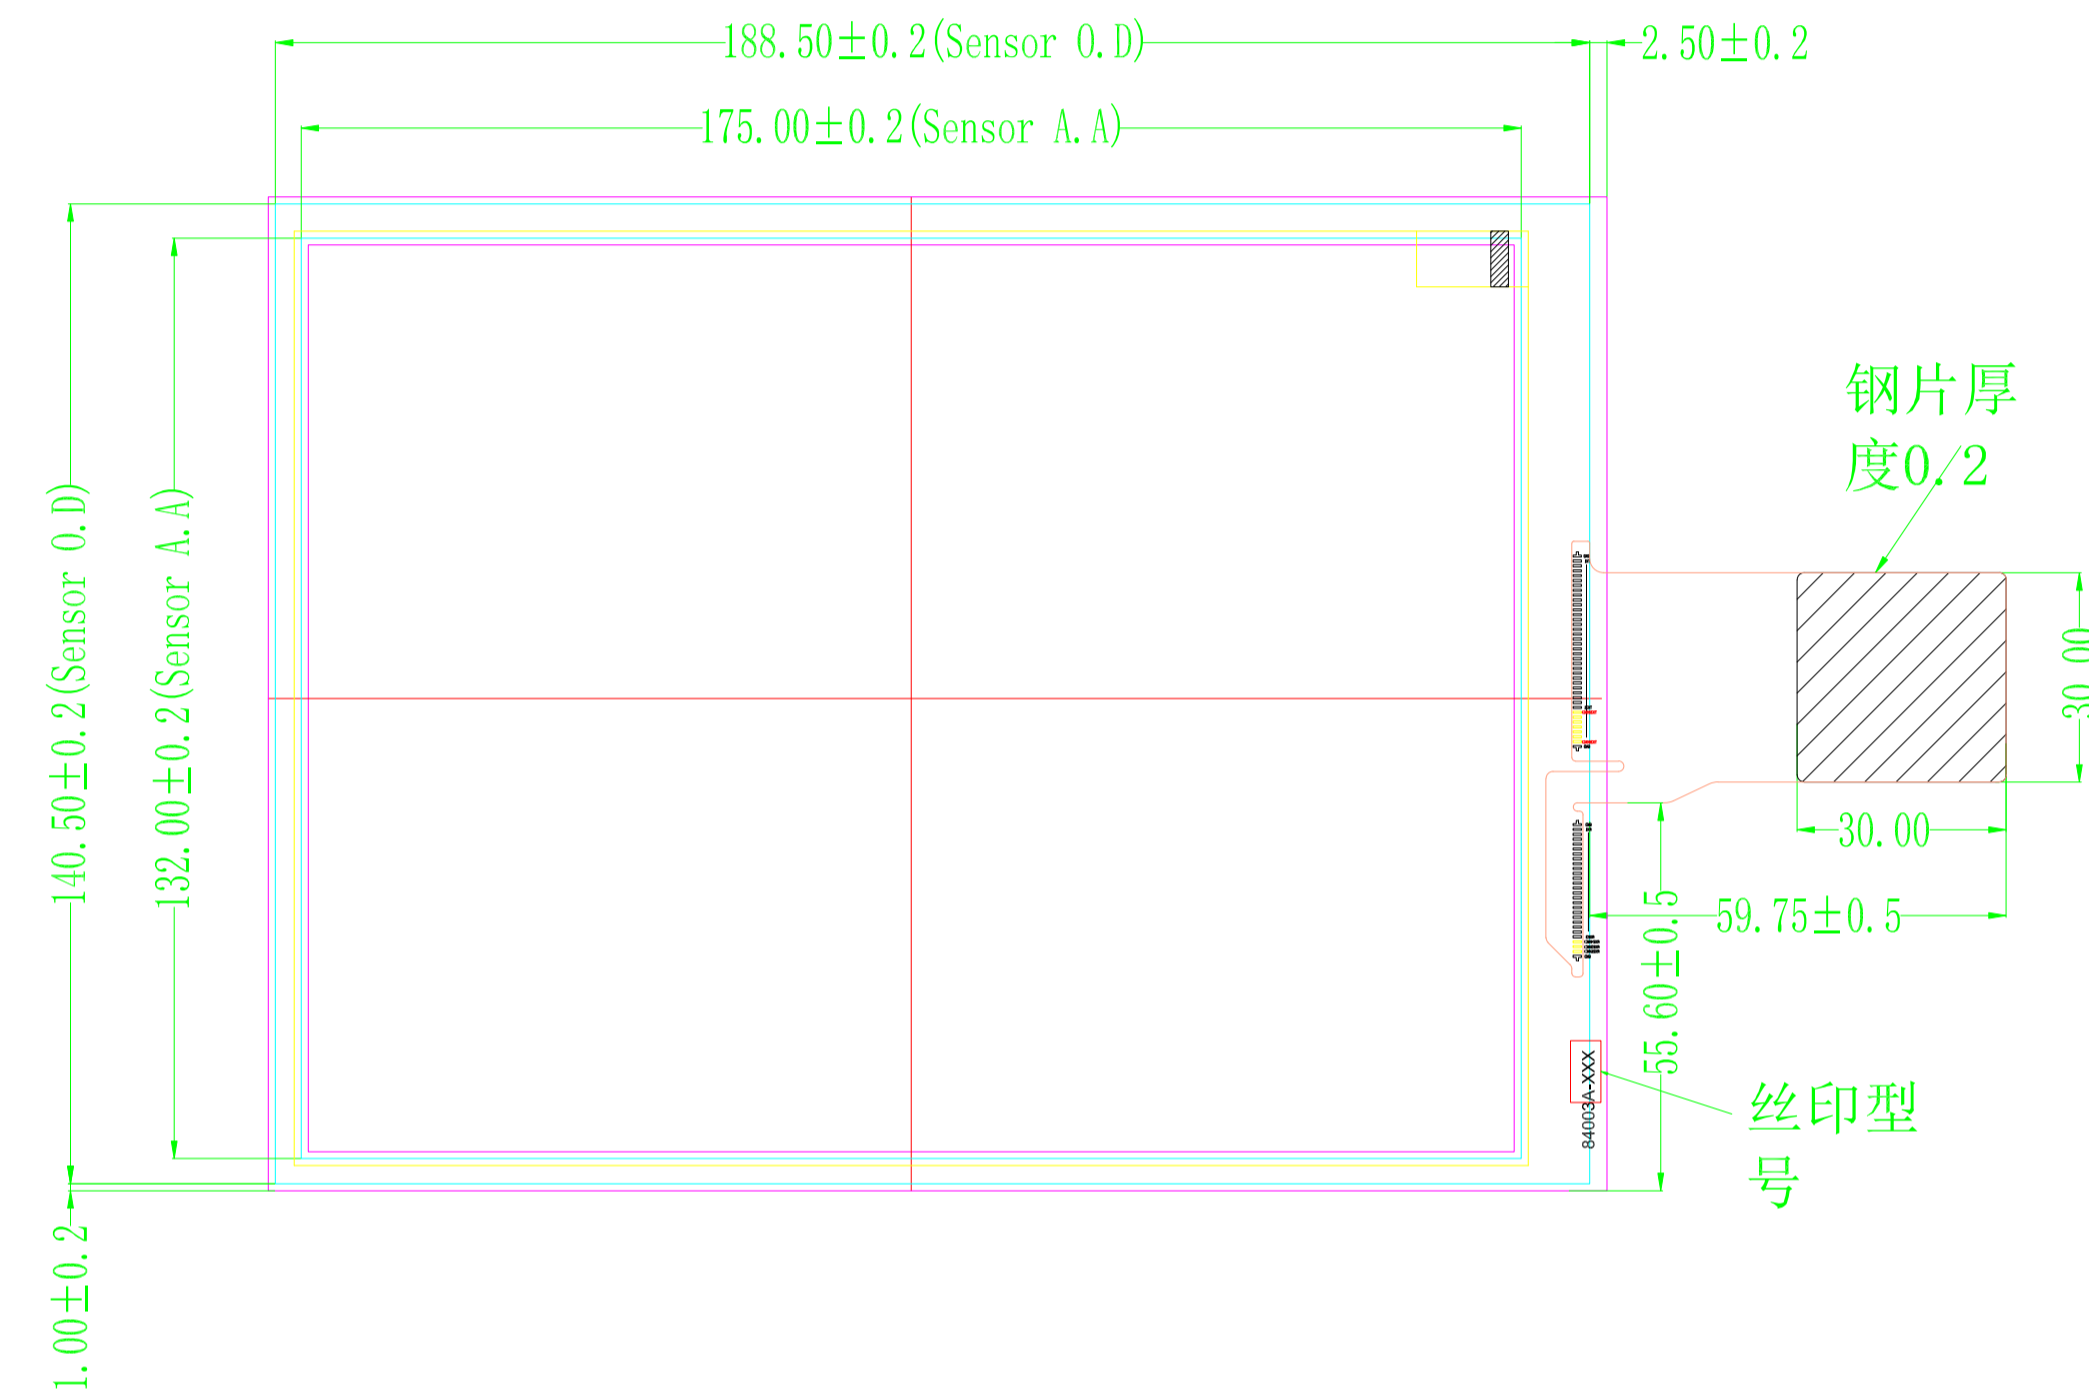

- LENS 1.10±0.1
- LOCA 0.20±0.05
- SENSOR 0.55±0.05
- TP TOTAL 1.85±0.15

侧视图



技術規格:

- COVER LENS 為強化玻璃;
- FPC接口為USB標準接口, 電壓: 5.0V ;
- IC: ILI2511 (TX31*RX23);
- 10點觸控;
- Surface hardness $\geq 7H$;
- 透光率為86%以上;
- 未注明公差為 $\pm 0.2mm$;
- 產品符合RoHS標準.
- Operating Temperature: $-10^{\circ}C \sim +60^{\circ}C$
Storage Temperature: $-20^{\circ}C \sim +70^{\circ}C$

IIC

PIN	定义
1	SDA
2	SCL
3	RESET
4	INT
5	GND
6	VDD3.3V

USB

PIN	定义
1	GND
2	D+
3	D-
4	VDD/5V

TP结构图



杭州旭虹科技有限公司
Hangzhou Xu Hong Technology Co., Ltd

Sheet	1 of 1	Model NO.	XH84003A-KDA-A2		
UNIT	mm	CUSTOMER P/N	8.4寸		
REV.	A0	Designed	PLX	Date	2018-01-16
Scale	FIT	Checked	CL	Date	2018-01-16
		Approved		Date	